ARTLINE G R Ø U P



LED BACKLIT MIRROR INSTALLATION INSTRUCTIONS



WARNNING!

Please read these instructions thoroughly before using this product. Save these instructions for future use.

***** IMPORTANT SAFETY INSTRUCTIONS

When using an electrical mirror basic precautions should always be followed, including the following:

Read all instructions before using this mirror.

DANGER: To reduce the risk of electric shock, always unplug the furnishing from the electrical outlet before cleaning.

WARNNING: Risk of Electric shock

This product must be connected to a grounded metal, permanent wiring system, or an equipment-grounding conductor must be run with the circuit conducts and connected to the equipment grounding terminal or lead to the product.

TO NOT remove the black triangle plastic corner mirror protectors before assembly of the mirror.

INSTALLATION:

1. Make sure the desired installation orientation is selected. Orientation arrow mark (A) or (B) can be found on the back

plate or the back of the mirror.

- 2. Mark on the wall the exact position of the mounting screws holes.
- 3. Install the back plate on the wall. Make sure they are firmly secured.
- 4. Insert power plug into an outlet or cut the plug if hardwired is necessary.
- 5. Insert the mirror onto the back plate cleats.
- 6. Remove the corner protector and peel off the surface protective sheet and clean the mirror after mirror is installed.
- 7. Turn on the switch and enjoy your lighted mirror.

TUSER MAINTENANCE INSTRUCTIONS

The user cannot do the maintenance operations by themselves and need to contact the supplier or a qualified electrician. Do not strike glass with hard or pointed items.

Do not allow moisture to come into contact with the lamp.

Cleaning: Mirrors should only be cleaned with glass cleaner and a soft lint free cloth.

Do not use any chemical or abusive cleaner as they may damage the surface of the products.


SMALL CHILDREN AND PETS WARNING

After mirror is unpacked, immediately dispose of packaging

WARRANTY

Any Repair or replacement of mirror parts must be performed by an authorized electrician. Unauthorized modifications to this product will compromise product ground safety and may result in electrical shock, electrical fire, or faulty operation. It could void the electrical portion of your warranty.

4 Sided Frosting on Edge

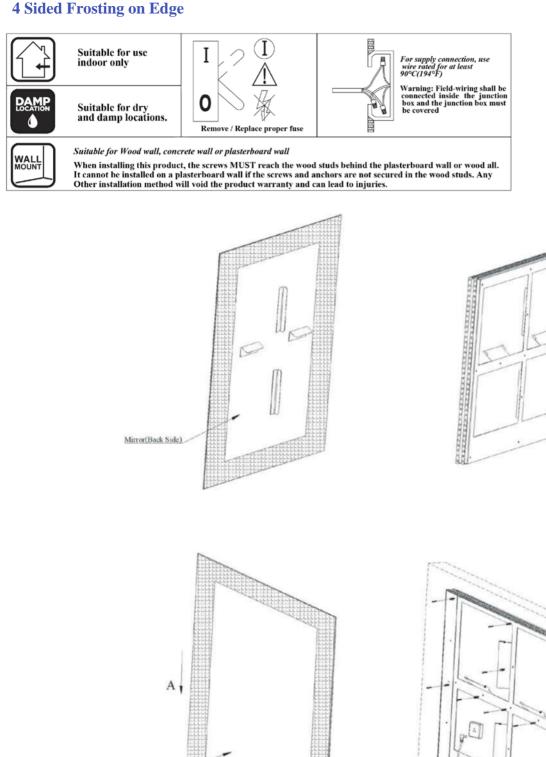

Intertek

Mirror(Front Side) Mounting Screws Drivers B Double LED strips


Item No.	SIZE	Kevin	Wattage	CRI	Lumen
LM4WG-C4836	48"x36 or 36"x48"	3000K	102	80	8160
LM4WG-C3636	36"x36"	3000K	85	80	6800
LM4WG-C3624	36"x24" or 24"x36"	3000K	68	80	5440


• Orientation of the mirror can be changed;

The mirror style and / or size may differ from what you have actually purchased.

ARTLINE G R Ø U P

2 Sided Frosting on Edge

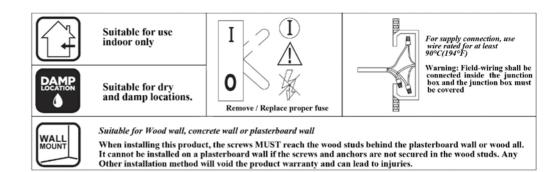

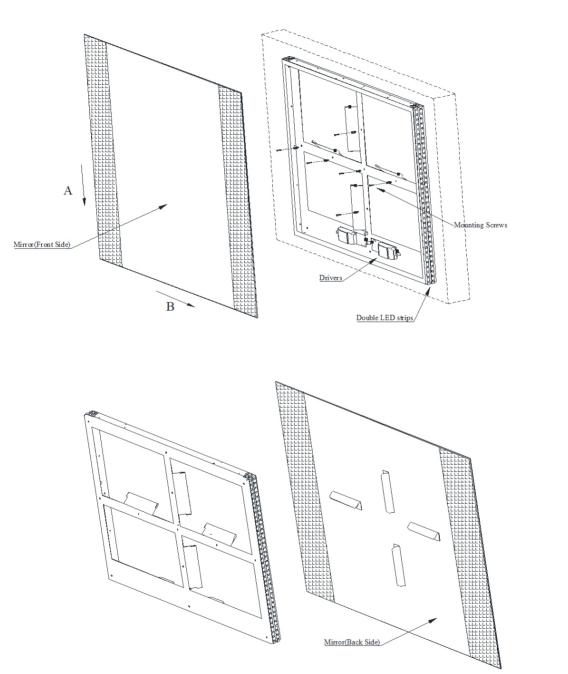




Item No.	SIZE	Kevin	Wattage	CRI	Lumen
LM2WG-C4836	48"x36 or 36"x48"	3000K	40	80	3600
LM2WG-C3636	36"x36"	3000K	40	80	3600
LM2WG-C3624	36"x24" or 24"x36"	3000K	40	80	3600


Orientation of the mirror can be changed;


 ${\ensuremath{\en$

ARTLINE G R / U P

4 Sided Inset Frosting

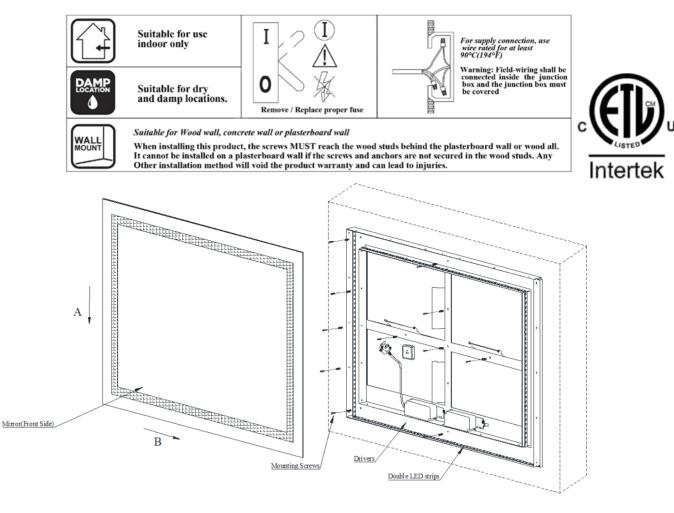






Item No.	SIZE	Kevin	Wattage	CRI	Lumen
LM4IS-C4836	48"x36 or 36"x48"	3000K	78	80	7020
LM4IS-C3636	36"x36"	3000K	64	80	5760
LM4IS-C3624	36"x24" or 24"x36"	3000K	51	80	4590

Orientation of the mirror can be changed;

The mirror style and / or size may differ from what you have actually purchased.

ARTLINE G R 🖉 U P

2 Sided Inset Frosting

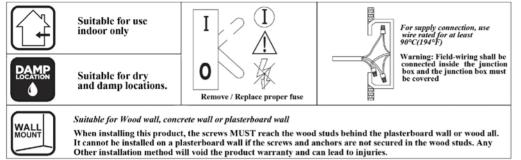





It cannot be installed on a plasterboard wall if the s Other installation method will void the product wa

A

Mirror(Front Side)

В



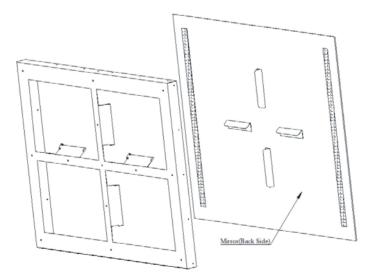

Item No.	SIZE	Kevin	Wattage	CRI	Lumen
LM2IS-C4836	48"x36 or 36"x48"	3000K	40	80	3600
LM2IS-C3636	36"x36"	3000K	40	80	3600
LM2IS-C3624	36"x24" or 24"x36"	3000K	40	80	3600

Orientation of the mirror can be changed;

The mirror style and / or size may differ from what you have actually purchased.

ARTLINE G R / U P